

INTERACTIVE DISPLAYS: VIEWBOARD IFP7552


KeyFeatures

- ❖ New Exterior Design with Innovative Multimedia Sound Bar
- ❖ USB-C for plug-and-play connectivity via a single cable
- ❖ Dual-pen, 33-point touch with naturally smooth writing experience
- ❖ Industry-leading audio and advanced eye-care technology
- ❖ Centralized remote management system via myViewBoard Manager



ProductDescription

The ViewBoard® 52 Series is a 4K Ultra HD interactive whiteboard equipped with user-centric design features and best-in-class collaboration tools for today's lessons made easy. With a single-cable solution for instant, worry-free connectivity and a unique angular design for easy access to shortcut keys and I/O ports, teachers can seamlessly connect and control for uninterrupted, flowing classes. Dual-pen capability, 33-point touch, Ultra Fine Touch and palm awareness technology combine for a naturally smooth writing experience and endless opportunities for student collaboration, supported by 2X15W front-facing speakers and a 15W subwoofer for amplified student engagement. In another industry-first feature of the display, teachers facilitating distance or hybrid learning from their personal device can easily access the 8-mic array and any connected visualizer to select the most appropriate camera and mic source. Complete with a browser-based remote management system, the ViewBoard 52 Series delivers a market-leading interactive whiteboard solution for teachers, students, and IT managers.

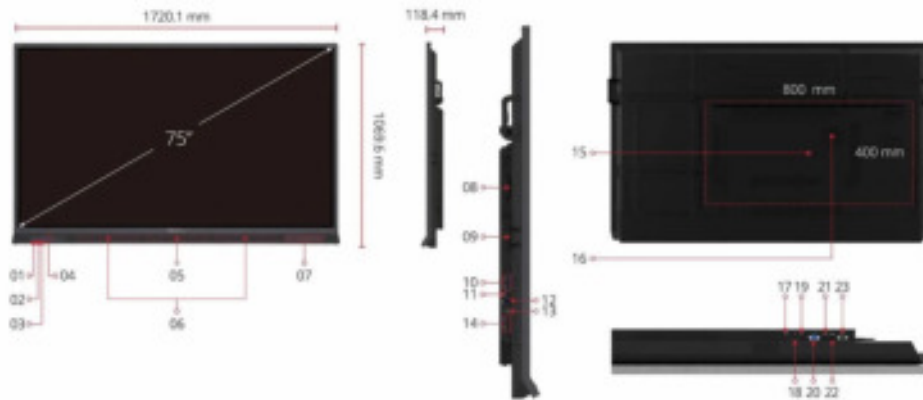

- | | | | |
|--------------------------|----------------------|-------------------------------------|--------------|
| 1. Type-C | 7. Menu Controls | 13. DP In | 18. LAN |
| 2. HDMI In | 8. OPS Slot | 14. HDMI In x 2 | 19. SPDIF |
| 3. Touch | 9. Wi-Fi Module Slot | 15. VESA® Wall Mount
800 x 400mm | 20. VGA |
| 4. USB 3.0 x 2 | 10. USB 3.0 x 2 | 16. Subwoofer | 21. Audio In |
| 5. 8-Microphone Array | 11. USB 2.0 | 17. HDMI Out | 22. Earphone |
| 6. Front-Facing Speakers | 12. Touch | | 23. RS232 |

DISPLAY

Panel Size:	75"
Panel Type:	TFT LCD Module with DLED Backlight.
Display Area (mm):	1649.644(H) x 927.936(V)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160 (Pixels)
Colors:	1.07B colors (10bit)
Brightness:	400 nits (typ.)
Contrast Ratio:	1200:1 Typ. , 5000:1 Max.(DCR enable)
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 Hours (Typ.)
Surface Treatment	Hardness: 7H and Anti-glare, Anti-fingerprint coating

PLATFORM

Processor:	ARM Cortex A73*4
RAM:	4GB (IFP6552-1A) 8GB (IFP6552-1B)
Storage:	32GB (IFP6552-1A) 64GB (IFP6552-1B)

TOUCH

Type/Tech:	UFT (Ultra Fine Touch) Technology
Touch Resolution:	32767 x 32767
Touch Point:	Windows: 33 points touch Android: 20 points touch

INPUT

HDMI:	x2 (3840x2160@60Hz, HDCP2.2, CEC, Front x1, Side x1) x1 (3840x2160@60Hz, HDCP2.2, CEC, ARC, Side x 1)
RGB/VGA:	x1 (1920x1080 @60Hz)
DisplayPort:	x1 (3840x2160 @60Hz)
Audio:	x1 (PC audio in)
RS232:	x1
OPS:	module slot x 1
WiFi:	module slot x 1

OUTPUT

HDMI:	x1 (on demand)
Audio:	x1 (Earphone out)
SPDIF:	x1 (optical)

LAN

RJ45:	x1
-------	----

USB

Type A:	USB 2.0 x 1 (Side x1) USB 3.0 x 4 (Front x2, Side x2, SmartPort™ USB)
Type B:	x2, for touch
Type C:	x1 (USB3.0, DP1.2 Alt Mode, Ethernet, PD 60W)

SPEAKERS

15W x 2 + 15W x 1 subwoofer

WEBCAM

x1 (up to 4K60Hz)

MICROPHONE

built-in 8-array microphone

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 9

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard WhiteBoard for Android
Pro Annotation Software:	myViewBoard WhiteBoard for Windows (embedded in VPC)
Wireless Presentation:	ViewBoard Cast & myViewBoard Display

SPECIAL FEATURES

All-in-one USB port (combine Windows/Android USB port; no need to distinguish them anymore):	USB 3.0 x 4
Simple LAN sharing between IFP and slot-in device:	10/100/1000M for Android and PC device:
Light Sensor:	Yes

POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	227W (Typ.) < 0.5 W ("Off")

ERGONOMICS

Wall Mount (VESA®):	800 x 400
---------------------	-----------

OPERATING CONDITIONS

Temperature:	32-104° F (0 - 40° C)
Humidity:	20% ~ 80% RH Non-Condensing

DIMENSIONS (WxHxD)

Physical (in. / mm):	1720.1 x 1069.6 x 118.4 (mm) 67.72 x 42.11 x 4.66 (in.)
Packaging (in. / mm):	1880 x 1160 x 280 (mm) 74.02 x 45.67 x 11.02 (in.)

WEIGHT

Net (lb / kg):	125.22 (lb) / 56.8 (kg)
Gross (lb / kg):	158.95 (lb) / 72.1 (kg)

REGULATIONS

cTUVus, FCC, EPEAT, Mexico coc, Mexico Energy, RoHS, Energy Star 8, CEC, EMC/CE, CB, RoHS & DOC, REACH, WEEE, ErP. EEI, RCM, BIS, PSE, VCCI, CCC, CECP, BSMI

PACKAGE CONTENTS

1. Power cable(3 meters) 2. Remote control 3. USB Type-C cable (1.5 meters) 4. USB Touch cable (3 meters, USB2.0) 5. Touch pen x 2 6. Quick Start Guide + Compliance statement 7. RS232 adapter 8. Clamp x 5 9. Camera Plate 10. Screw x 8 (camera 2+2, wall mount 4) 11. HDMI cable (3 meters) 12. Eraser 13. AAA Battery x 2

COMPATIBLE SLOT-IN PC

VPC12 & VPC25/27-0 & VPC25/27-0-B series